

Technical Data Sheet

Rosenberger

Termination Load

L-100-NM

Main features

Wide frequency band
 Low VSWR
 Excellent capacity in anti-pulse and burnout
 Easy to be installed

Electrical data

Frequency	DC to 3GHz
Return Loss/VSWR	≤ -19dB/1.25
Power handling	100W@ 25°C
Impedance	50 Ω


Environmental data

Operating temperature range	-35°C to +125°C
Relative humidity	5%- 95%
Barometric pressure	55KPa -106KPa
Applications	Indoor

Mechanical data

Dimension	188 x 68 x 70 (mm)
Weight	1800g
Connectors type	N male
Mounting	Plane
Packing	1Pce in box

Outline Drawing

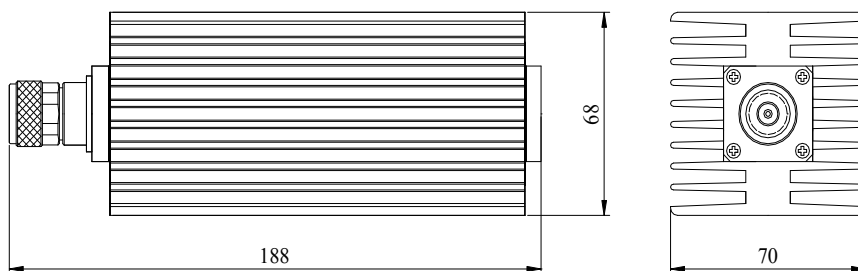

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Checker	Approved	Date	Rev.	Engineering change number	Name	Date
XQ.W	11/04/10	CY.X	Joson	11/25/10	1.1		XQ.W	19/Jan/16
Rosenberger Hochfrequenztechnik GmbH & Co. KG Tel.: +49 8684 18-0 Fax: +49 8684 18-499 www.rosenberger.de email : info@rosenberger.de					Rosenberger (Shanghai) Technology Co., Ltd. Tel.: +86 21 69214567 Fax: +86 21 69212923 www.rosenbergerap.com email: info@rosenbergerap.com			Page 1 / 1