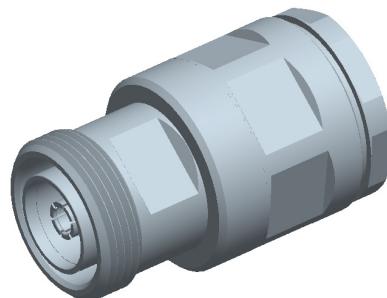
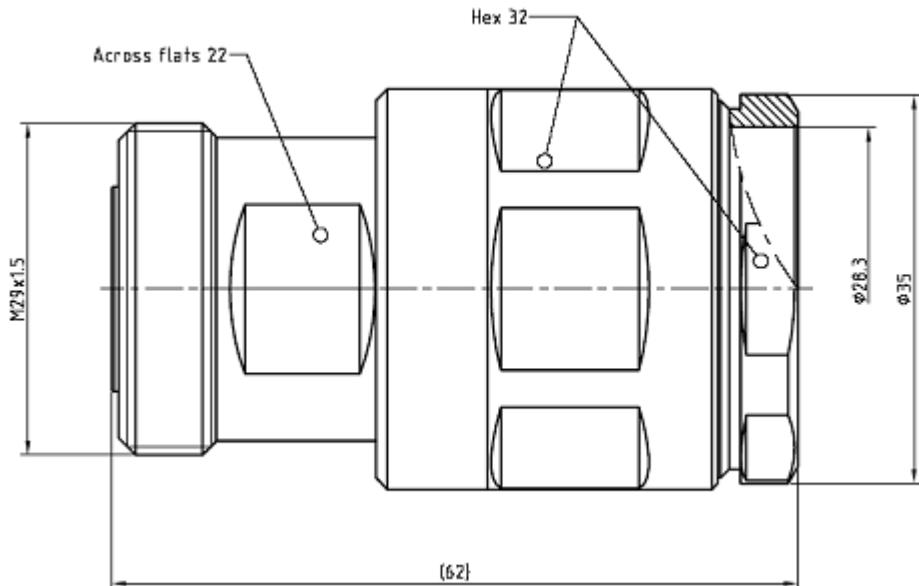


7-16

STRAIGHT JACK
(7/8"R)**60K1C7-CX5N1**

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 61169-4, EN 122190, DIN 47223

Documents

Assembly instruction

MA_1C7-CX5

Material and plating

Connector parts

Center contact
Outer contact
Back nut
Dielectric
Gasket
Spring part

Material

Spring bronze
Brass
Brass
TPX
Silicone
Spring bronze

Plating

Silver, 3-6 µm
Flash white bronze over silver(e.g. Optargen®)
Nickel, 2.5-5 µm

Tin, 1-3 µm

